



PANORAMIC OF SITE FROM E OLD SR 46

SITE
ACCESS
POINTS



E OLD SR 46—LOOKING SOUTHWEST



FUTURE ENTRY + EXIT DRIVE LOCATIONS




E OLD SR 46—LOOKING NORTH


prince alexander

ARCHITECTURE ENGINEERING URBAN DESIGN LAND PLANNING ECONOMIC DEVELOPMENT INTERIOR DESIGN

850 SOUTH MERIDIAN STREET INDIANAPOLIS IN 46225-1110 317-261-0070 WWW.PRINCEALEXANDER.BIZ

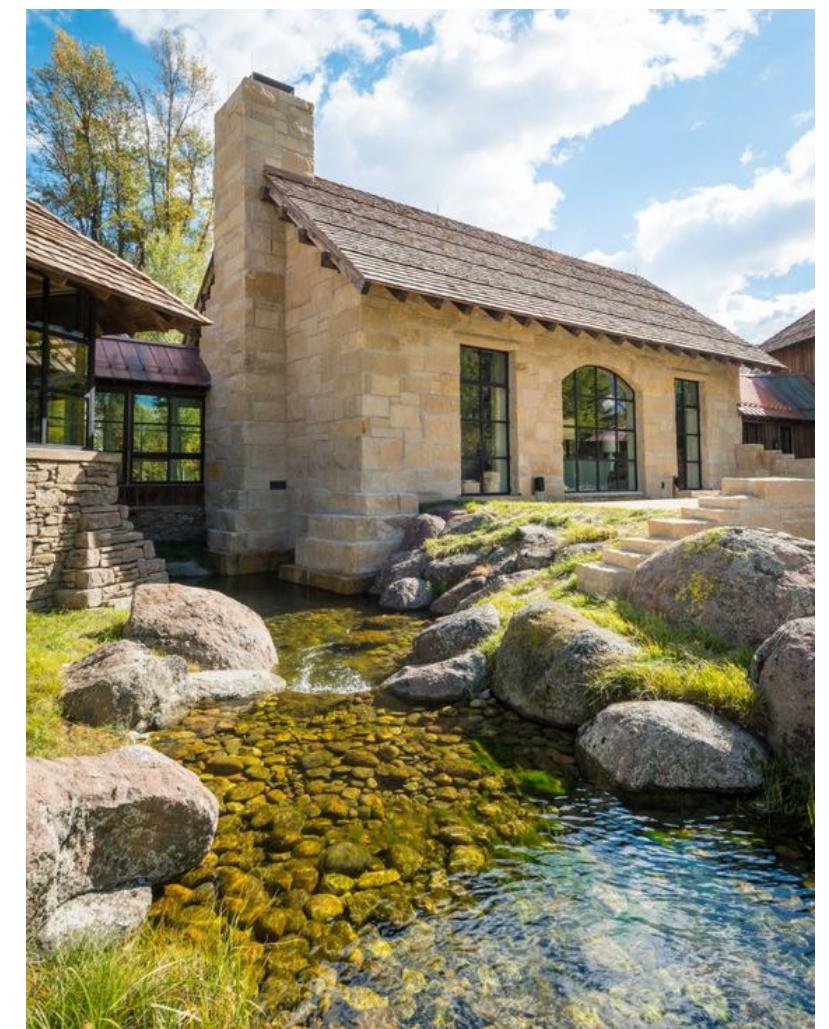



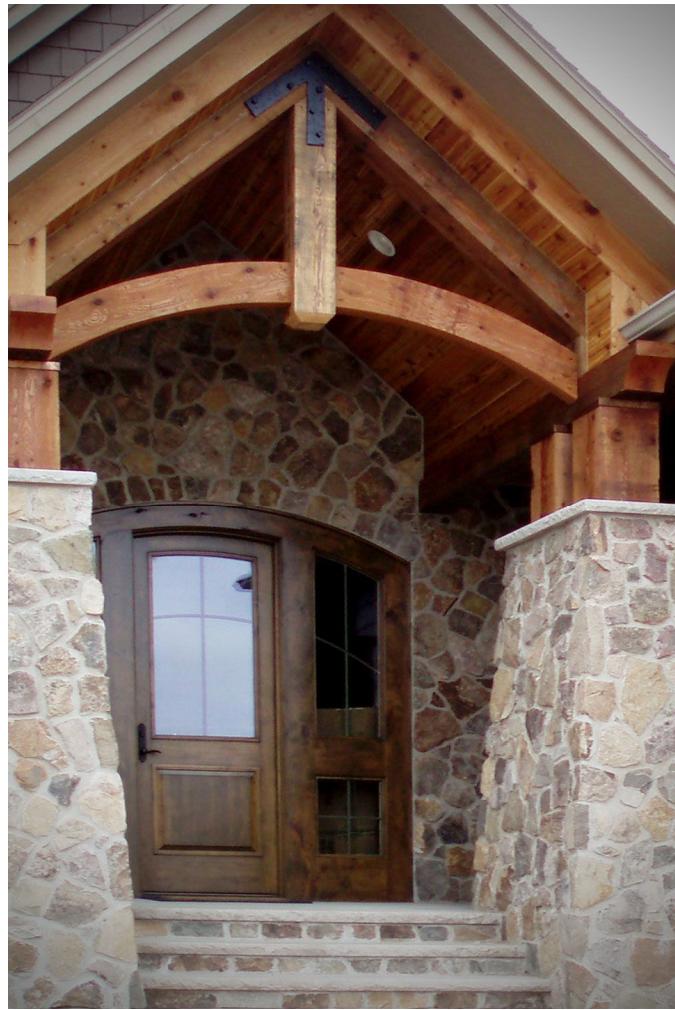

TYPICAL MATERIAL EXAMPLES
prince alexander

ARCHITECTURE ENGINEERING URBAN DESIGN LAND PLANNING ECONOMIC DEVELOPMENT INTERIOR DESIGN

850 SOUTH MERIDIAN STREET INDIANAPOLIS IN 46225-1110 317-261-0070 WWW.PRINCEALEXANDER.BIZ



© A.B. Martin Roofing Supply, LLC. All rights reserved. All copyrights are held by




RED BLEND ASPHALT SHINGLES



BRIGHT RED METAL PANEL ROOFING



WHITE LP SMARTSIDE TRIM BOARDS

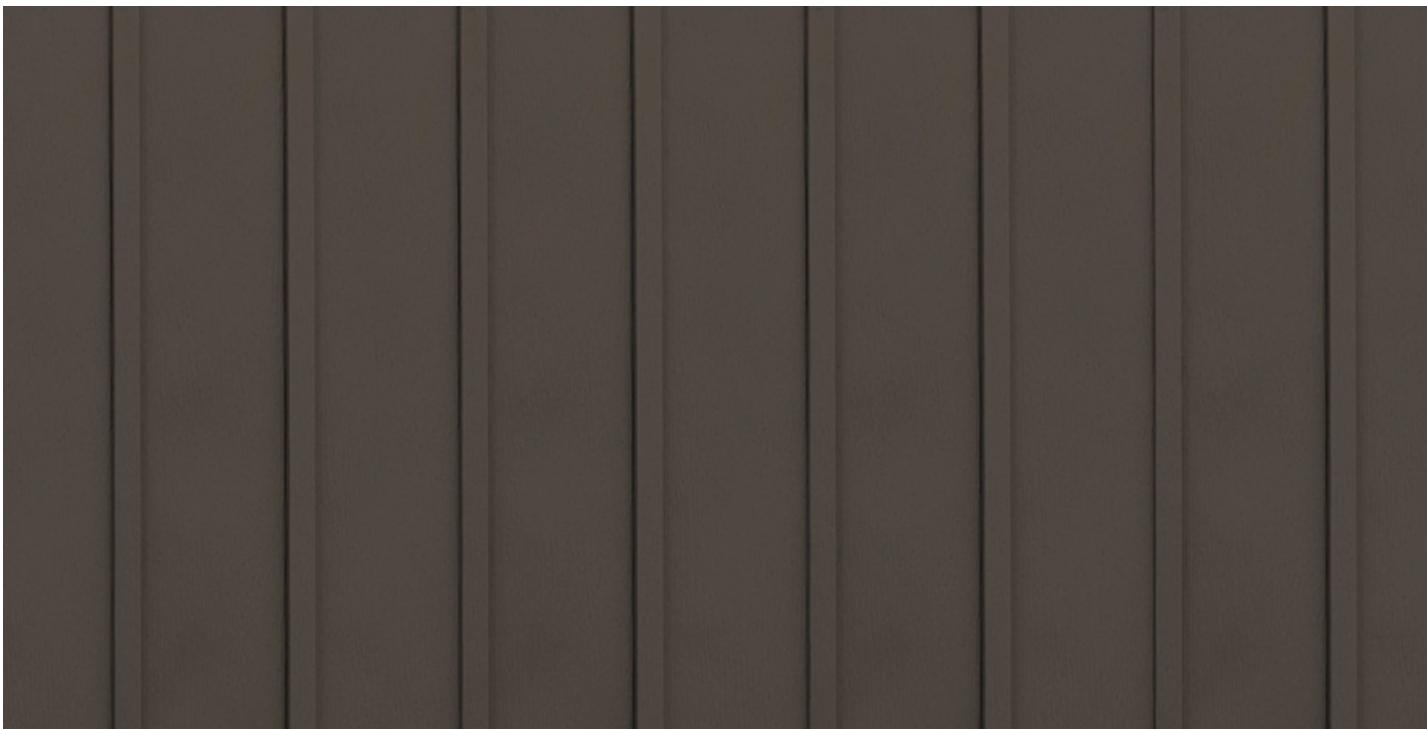

DARK BROWN BOARD & BATTEN SIDING



BROWN COUNTY STONE WEB WALL PATTERN




prince alexander

ARCHITECTURE ENGINEERING URBAN DESIGN LAND PLANNING ECONOMIC DEVELOPMENT INTERIOR DESIGN

850 SOUTH MERIDIAN STREET INDIANAPOLIS IN 46225-1110 317-261-0070 WWW.PRINCEALEXANDER.BIZ

Teardrop (TF9) Specification Sheet

Project Name: BLUE ELK RET. RESORT Location: NASHVILLE, TN MFG: Hadco
Fixture Type: Catalog No.: Qty:

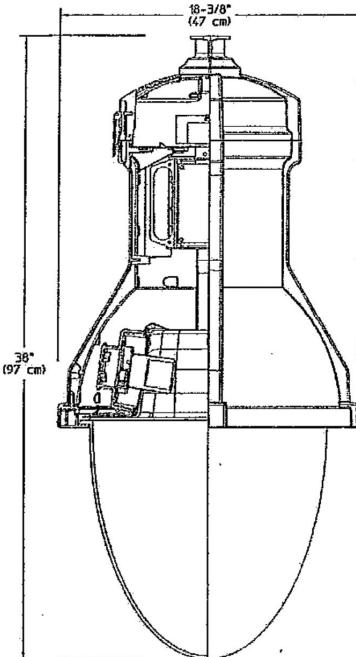

Ordering Guide

Example: TF9 N A GF 3 N D 150S E

Product Code	TF9	Teardrop
Mounting	N	Cast Neck
	P	Threaded Pipe
Finish	A	Black
	B	White
	G	Verde
	H	Bronze
	J	Green
Lens	GF	Flat Glass *1
	GL	Glass Long
	KL	Globe
	KL	Acrylic Long
	KL	Globe
Optics	3	Type III
	4	Type IV
	5	Type V
Photo Control	N	None
Socket	D	Medium
	G	Mogul
	R	Induction *4
Wattage	150S	150W HPS
	200S	200W HPS *3
	250S	250W HPS *3
	400S	400W HPS *3
	175H	175W MH
	250H	250W MH *3
	400H	400W MH *3
	400HB	400W MH *3, 6
	BT/ED37	BT/ED37
	175P	175W PMH *7
	200P	200W PMH *3, 7
	250P	250W PMH *3, 7
	320P	320W PMH *3, 7
	350P	350W PMH *3, 7
	400PB	400W PMH *3, 6, 7
	BT/ED37	BT/ED37
	85R	85W Induction *2, 4, 5
Voltage	E	120V
	F	208V
	G	240V
	H	277V
	J	480V
	K	347V

CAT# TF9 - P-FINISH - KL -TYPE III OR TYPE V-N- G = 250PMH - Voltage

- *1 For use with Type III (3) optics only.
- *2 Available in Type IV (4) and Type V (5) optics only.
- *3 Available with Mogul Base (G) socket only.
- *4 Consult Factory for ordering Induction (R) socket or wattages.
- *5 Not available in 347V (K).
- *6 Uses BT37 or ED37 lamp.
- *7 Title 20 compliant ballast.

Specifications

HOUSING:

360 low-copper die-cast aluminum alloy. Single, stainless steel exterior latch. Tool-less lamp access. Tool-less ballast access. Tool-less ballast assembly with quick disconnects for easy maintenance. A weatherproof ballast assembly isolates the ballast from water and heat for longer life. IP66 optical chamber seals out dust, insects, and moisture. Cast Neck option (N) for use with clamp collar, or Threaded Pipe option (P) 1-1/2-11.5 MPSM pipe nipple for mounting to arm. All non-ferrous fasteners prevent corrosion and ensure longer life.

ISO 9001:2000 Registered

Note: Hadco reserves the right to modify the above details to reflect changes in the cost of materials and/or production and/or design without prior notice.
100 Craftway Littlestown, PA 17340 tel(717) 359-7131 fax (717) 359-9289 www.hadco.com Copyright 2008 Philips

HADCO is a Philips group brand

PHILIPS

Site and Area Poles PSRTB

* PSRTB - Steel Round Tapered w/BaseCat# PSRTB-6-L-20'. FINISH - P1
(SINGLES)

Ordering Guide


Ordering Example: PSRTB4L10XW

HEIGHT/EPA WIND ZONE*

PRODUCT CODE	BASE TYPE	9" (H) HEIGHT	COLOR	LOADING	MOUNTING	WALL THICKNESS	TUBING TOP TUBING BOTTOM			
							(A) Black	(B) White	(N) North	(S) South
PSRT	B	4	L	10	()	()	11 ga.	11.6	8.9	7.0
PSRT	B	5	L	12	()	()	11 ga.	11.8	9.0	7.1
PSRT	B	5	L	14	()	()	11 ga.	11.4	8.7	6.8
PSRT	B	6	L	18	()	()	11 ga.	8.9	6.7	5.2
PSRT	B	6	L	20	()	()	11 ga.	19.3	15.1	12.2
PSRT	B	7	H	20	()	()	11 ga.	19.3	15.6	3.7
PSRT	B	6	L	25	()	()	11 ga.	12.5	9.9	8.0
PSRT	B	7	H	25	()	()	7 ga.	30.5	24.0	19.8
PSRT	B	7	L	30	()	()	11 ga.	11.7	9.3	7.5
PSRT	B	8	H	30	()	()	7 ga.	33.5	27.0	22.0
PSRT	B	7	L	35	()	()	11 ga.	11.2	8.9	7.1
PSRT	B	9	H	35	()	()	11 ga.	16.9	15.1	3.6

*EPA values based on destructive break testing. For AASHTO ratings, contact factory.

BOTTOM POLE DIAMETER	BOLT CIRCLE	ANCHOR RODS	BASE SIZE	HAND HOLE
4"	8"	(4) 3/4" dia. x 17" L	8 1/2"	3" x 5"
5"	8"	(4) 3/4" dia. x 17" L	8 1/2"	3" x 5"
6" (L18)	8"	(4) 3/4" dia. x 17" L	8 1/2"	3" x 5"
7" (L20, L30)	9"-10"	(4) 1" dia. x 36" L	10" Square	3" x 5"
7" (H25)	9 1/2"-10 1/2"	(4) 1" dia. x 36" L	10 7/8" Square	4" x 6 1/2"
7" (L35)	10"-11"	(4) 1" dia. x 36" L	11 1/4" Square	4" x 6 1/2"
8"	10 1/2"-11 1/2"	(4) 1 1/4" dia. x 42" L	11 1/2" Square	4" x 6 1/2"
9"	11"-12"	(4) 1" dia. x 36" L	12" Square	4" x 6 1/2"

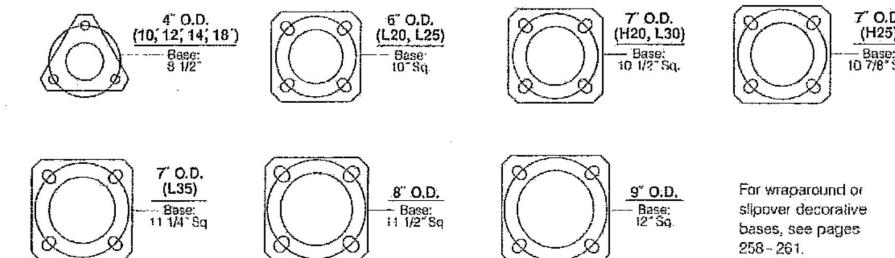For wraparound or
slipover decorative
bases, see pages
258-261.

For more information on the PSRTB, please visit www.hadco.com. Search by product name or number.

TF9 Radial Wave Brim (TF9-RB)

Page 1 of 1

** FIXTURE BRIM*

Hadco Products News Training About Hadco Representative Locator

TF9 Radial Wave Brim (TF9-RB): Commercial; Commercial Accessories

Cat# TF9-RB-FINISH

Specifications

HOUSING: Radial Wave Brim is 11 Ga. spun 1100-O aluminum alloy. Attaches to fixture lens ring via (4) thru and key slots. Easily installed in the field.

FINISH: Thermocet polyester powdercoat is electrostatically applied after a five-stage conversion cleaning by heat fusion thermosetting. Laboratory tested for superior weatherability and fade resistance in accordance 64 and ANSI/ASTM G53-77 specifications. For larger projects where a custom color is required, contact the information.

CERTIFICATIONS: Manufactured to ISO 9001:2000 Standards.

WARRANTY: Three-year limited warranty.

Additional Information

Specification Sheet *Example: TF9-RB A*

Product Code	TF9-RB TF9 Radial Wave Brim
Finish	A Black B White C Bronze D Verde E Green

Accessories

None Available

What you want. How you want it. When you want it.


© 2008 Hadco. All rights reserved. Hadco is a registered trademark of Hadco Inc.

<http://www.hadco.com/Hadco/Public/ProductDetail.aspx?pid=1292>


10/28/2008

Hanging Fixtures—Post Mounting Arm Brackets


HFP610




HFP620



HFP710



HFP810



NOTE: For twin arms, consult factory.

NOTE: For twin arms, consult factory.

For more information on Arm Brackets, please visit www.hadco.com. Search by product name or number.

Ordering Guide

Ordering Example: HFP810-P4BPM
 Arm Dia. Finish

PRODUCT CODE	POST MOUNTING DIAMETER	FINISH	POST MACHINING	DESCRIPTION	EPA
HFP610	P3, P4, P5	()	PM	Single Arm	1.10
HFP620	P3, P4, P5	()	PM	Twin Arm (180°)	2.05
HFP710	()	()	PM	Single	3.00
HFP810	()	()	PM	Single Arm	2.50

P.O. Box 128 • 100 Craftway • Littlestown, PA 17340 • Phone: 717-359-7131 • Fax: 717-359-9289

HADCO

2

prince alexander

ARCHITECTURE ENGINEERING URBAN DESIGN LAND PLANNING ECONOMIC DEVELOPMENT INTERIOR DESIGN

850 SOUTH MERIDIAN STREET INDIANAPOLIS IN 46225-1110 317-261-0070 WWW.PRINCEALEXANDER.BIZ